


CJBX/ALF

Belt driven ventilation units with pre-lacquered sheet, built-in filters and aluminium profiles



Fan:

- Ventilation units equipped with double inlet fans of the CBX, CBXC and CBXR series.
- Aluminium profile structure with thermal insulation and soundproofing.
- Forward curved impeller in galvanized sheet steel.
- Glands for cable entry.

- Three-phase 230/400 V 50 Hz (up to 4 kW) and 400/690 V 50 Hz (powers greater than 4 kW).
- Maximum temperature of air to be carried: -20 °C +60 °C.

Finish:

- Anti-corrosive in pre-lacquered steel sheet and aluminum profiles.


Motor:

- Motors with IE3 efficiency for powers equal to or greater than 0.75 kW, except single-phase, 2-speed and 8-pole.
- Class F motors with ball bearings and IP55 protection.

On request:

- With circular outlet.

Order code

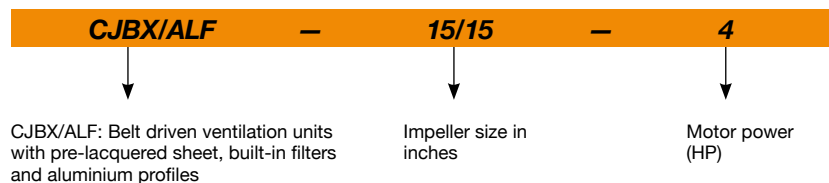

Technical characteristics

Model	Speed (r/min)	Maximum admissible current (A)			Installed power (kW)	Maximum flow rate (m ³ /h)	Sound pressure level dB (A)	Approx. weight (Kg)	Mounting type	According ErP
		230V	400V	690V						
CJBX/ALF-7/7-0.75	1400	2.92	1.69		0.55	1200	56	41	A	2018
CJBX/ALF-7/7-1 IE3	1600	3.10	1.79		0.75	1450	58	43	A	2018
CJBX/ALF-9/9-0.25	825	1.23	0.71		0.18	1700	45	48	A	2018
CJBX/ALF-9/9-0.33	920	1.66	0.96		0.25	1800	48	50	A	2018
CJBX/ALF-9/9-0.5	1020	2.02	1.17		0.37	2200	51	52	A	2018
CJBX/ALF-9/9-0.75	1050	2.92	1.69		0.55	2900	55	55	A	2018
CJBX/ALF-9/9-1 IE3	1070	3.10	1.79		0.75	3200	56	56	A	2018
CJBX/ALF-9/9-1.5 IE3	1260	4.03	2.32		1.10	3750	60	59	A	2018
CJBX/ALF-10/10-0.75	845	2.92	1.69		0.55	3800	56	57	A	2018
CJBX/ALF-10/10-1 IE3	960	3.10	1.79		0.75	4175	58	59	A	2018
CJBX/ALF-10/10-1.5 IE3	1070	4.03	2.32		1.10	4800	61	61	A	2018
CJBX/ALF-10/10-2 IE3	1140	5.96	3.44		1.50	5400	63	65	A	2018
CJBX/ALF-12/12-0.5	595	2.02	1.17		0.37	4200	52	69	A	2018
CJBX/ALF-12/12-0.75	675	2.92	1.69		0.55	4800	54	71	A	2018
CJBX/ALF-12/12-1 IE3	765	3.10	1.79		0.75	5400	57	72	A	2018
CJBX/ALF-12/12-1.5 IE3	855	4.03	2.32		1.10	5800	59	75	A	2018
CJBX/ALF-12/12-2 IE3	965	5.96	3.44		1.50	6500	62	79	A	2018

Technical characteristics

Model	Speed (r/min)	Maximum admissible current (A)			Installed power (kW)	Maximum flow rate (m ³ /h)	Sound pressure level dB (A)	Approx. weight (Kg)	Mounting type	According ErP
		230V	400V	690V						
CJBX/ALF-12/12-3 IE3	1180	8.36	4.83		2.20	7400	65	87	A	2018
CJBX/ALF-15/15-0.75	525	2.92	1.69		0.55	5900	49	85	B	2018
CJBX/ALF-15/15-1 IE3	595	3.10	1.79		0.75	6500	52	86	B	2018
CJBX/ALF-15/15-1.5 IE3	635	4.03	2.32		1.10	7500	54	89	B	2018
CJBX/ALF-15/15-2 IE3	670	5.96	3.44		1.50	8200	56	93	B	2018
CJBX/ALF-15/15-3 IE3	740	8.36	4.83		2.20	9500	59	101	B	2018
CJBX/ALF-15/15-4 IE3	805	10.96	6.33		3.00	10600	61	103	B	2018
CJBX/ALF-18/18-1.5 IE3	480	4.03	2.32		1.10	9000	48	122	B	2018
CJBX/ALF-18/18-2 IE3	605	5.96	3.44		1.50	9250	51	125	B	2018
CJBX/ALF-18/18-3 IE3	590	8.36	4.83		2.20	11500	54	134	B	2018
CJBX/ALF-18/18-4 IE3	640	10.96	6.33		3.00	13200	56	136	B	2018
CJBX/ALF-18/18-5.5 IE3	675	14.10	8.12		4.00	15000	58	141	B	2018
CJBX/ALF-18/18-7.5 IE3	760		11.60	6.72	5.50	17000	60	155	B	2018
CJBX/ALF-20/20-2 IE3	430	5.96	3.44		1.50	11500	56	222	B	2018
CJBX/ALF-20/20-3 IE3	530	8.36	4.83		2.20	12800	57	231	B	2018
CJBX/ALF-20/20-4 IE3	575	10.96	6.33		3.00	14200	58	233	B	2018
CJBX/ALF-20/20-5.5 IE3	635	14.10	8.12		4.00	15500	61	238	B	2018
CJBX/ALF-20/20-7.5 IE3	675		11.60	6.72	5.50	17500	63	252	B	2018
CJBX/ALF-20/20-10 IE3	725		13.90	8.06	7.50	20000	65	283	B	2018
CJBX/ALF-22/22-2 IE3	385	5.96	3.44		1.50	14000	50	250	B	2018
CJBX/ALF-22/22-3 IE3	475	8.36	4.83		2.20	15000	54	257	B	2018
CJBX/ALF-22/22-4 IE3	515	10.96	6.33		3.00	17000	55	261	B	2018
CJBX/ALF-22/22-5.5 IE3	570	14.10	8.12		4.00	19000	57	265	B	2018
CJBX/ALF-22/22-7.5 IE3	605		11.60	6.72	5.50	21500	60	279	B	2018
CJBX/ALF-22/22-10 IE3	675		13.90	8.06	7.50	25000	63	306	B	2018
CJBX/ALF-22/22-15 IE3	765		20.90	12.10	11.00	27000	65	341	B	2018
CJBX/ALF-25/25-3 IE3	375	8.36	4.83		2.20	17000	53	297	B	2018
CJBX/ALF-25/25-4 IE3	405	10.96	6.33		3.00	20500	55	299	B	2018
CJBX/ALF-25/25-5.5 IE3	450	14.10	8.12		4.00	22000	57	304	B	2018
CJBX/ALF-25/25-7.5 IE3	485		11.60	6.72	5.50	24500	59	318	B	2018
CJBX/ALF-25/25-10 IE3	545		13.90	8.06	7.50	28000	61	345	B	2018
CJBX/ALF-25/25-15 IE3	610		20.90	12.10	11.00	32000	64	374	B	2018
CJBX/ALF-30/28-3 IE3	330	8.36	4.83		2.20	20000	54	380	B	2018
CJBX/ALF-30/28-4 IE3	360	10.96	6.33		3.00	22000	56	382	B	2018
CJBX/ALF-30/28-5.5 IE3	380	14.10	8.12		4.00	25000	59	387	B	2018
CJBX/ALF-30/28-7.5 IE3	380		11.60	6.72	5.50	31500	60	402	B	2018
CJBX/ALF-30/28-10 IE3	410		13.90	8.06	7.50	36000	63	431	B	2018
CJBX/ALF-30/28-15 IE3	430		20.90	12.10	11.00	42000	65	451	B	2018
CJBX/ALF-30/28-20 IE3	480		27.90	16.20	15.00	48000	68	466	B	2018




Erp. (Energy Related Products)

Information on Directive 2009/125/EC can be downloaded from the SODECA website or the QuickFan selector programme.


Dimensions mm

CJBX/ALF
Standard supply
horizontal impulsion
(H) LG 90

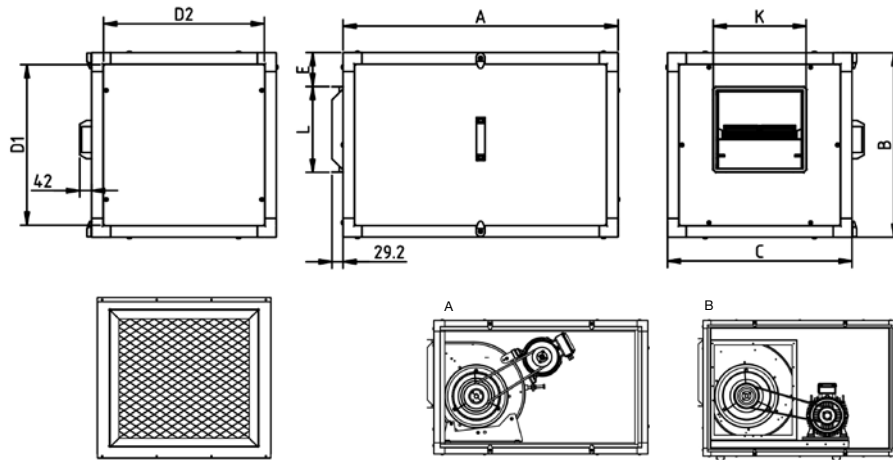

	A	B	C	D1	D2	E	L	K	Mounting type
CJBX/ALF-7/7	830	490	490	428	428	91	226	247	A
CJBX/ALF-9/9	920	550	550	488	488	86	279	317	A
CJBX/ALF-10/10	970	605	605	543	543	88	306	343	A
CJBX/ALF-12/12	1050	680	680	618	618	84	360	404	A
CJBX/ALF-15/15	1220	855	855	793	793	119	423	490	B
CJBX/ALF-18/18	1356	1000	1000	938	938	137	498	554	B
CJBX/ALF-20/20	1500	1195	1195	1115	1115	140	615	615	B
CJBX/ALF-22/22	1600	1250	1250	1170	1170	104	705	668	B
CJBX/ALF-25/25	1870	1450	1450	1370	1370	200	792	767	B
CJBX/ALF-30/28	1975	1670	1670	1590	1590	188	938	896	B

CJBX/ALF
On request vertical
impulsion (V) LG 0


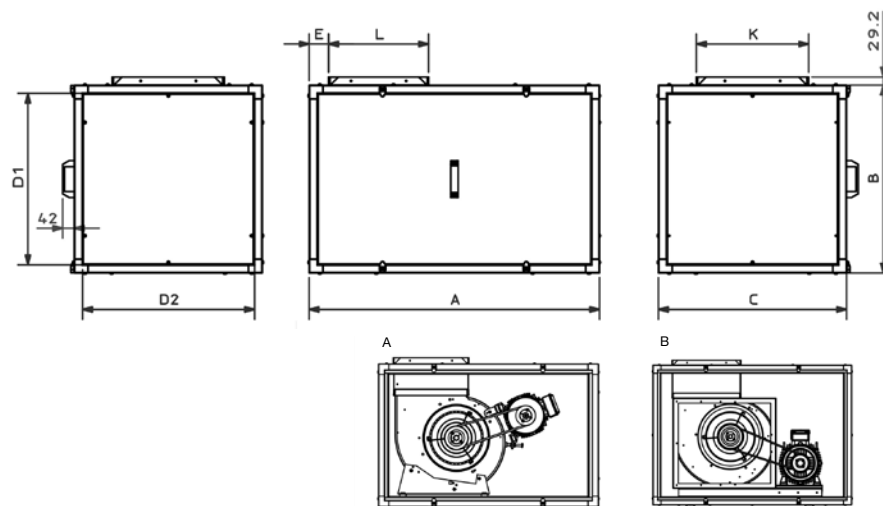


	A	B	C	D1	D2	E	L	K	Mounting type
CJBX/ALF-7/7	830	490	490	428	428	63	226	247	A
CJBX/ALF-9/9	920	550	550	488	488	85	279	317	A
CJBX/ALF-10/10	970	605	605	543	543	87	306	343	A
CJBX/ALF-12/12	1050	680	680	618	618	69	360	404	A
CJBX/ALF-15/15	1220	855	855	793	793	115	423	490	B
CJBX/ALF-18/18	1356	1000	1000	938	938	80	498	554	B
CJBX/ALF-20/20	1500	1195	1195	1115	1115	125	615	615	B
CJBX/ALF-22/22	1600	1250	1250	1170	1170	125	705	668	B
CJBX/ALF-25/25	1870	1450	1450	1370	1370	85	792	767	B
CJBX/ALF-30/28	1975	1670	1670	1590	1590	155	938	896	B

Characteristic curves

Q= Flow rate in m³/h, m³/s and cfm



Pe= Static pressure in mm H₂O, Pa and inwg

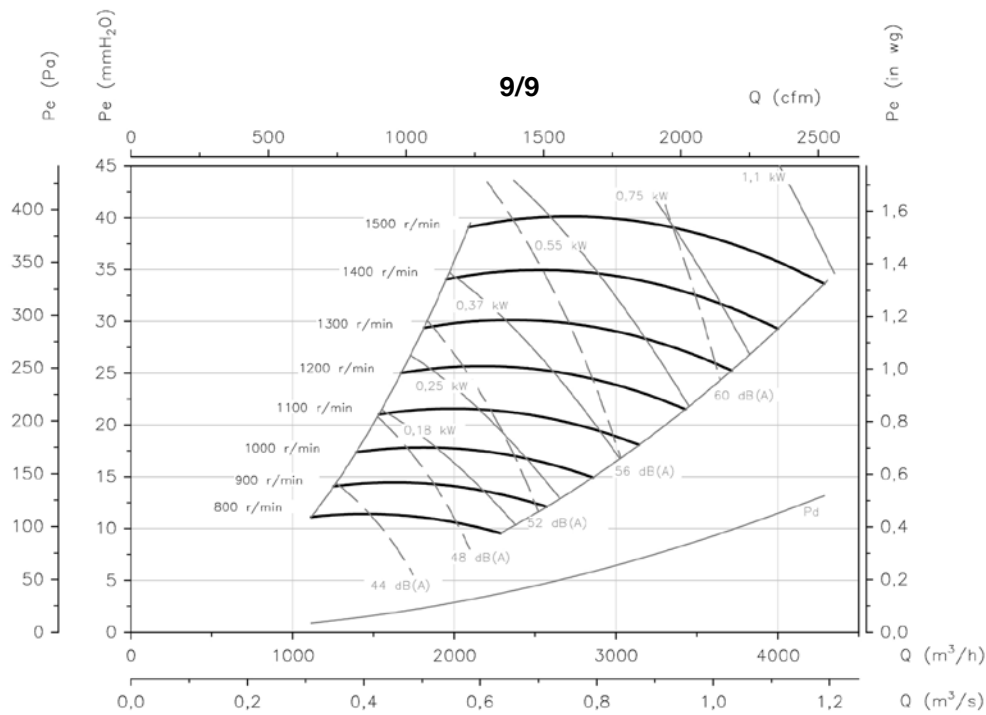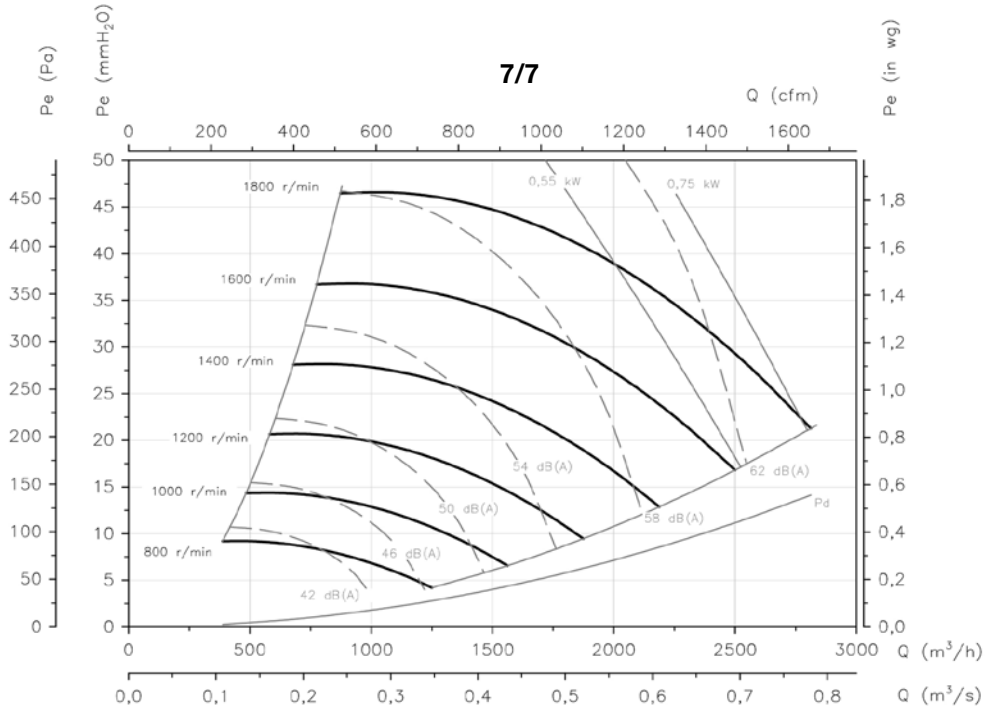

Characteristic curves

Q= Flow rate in m³/h, m³/s and cfm



Pe= Static pressure in mm H₂O, Pa and inwg

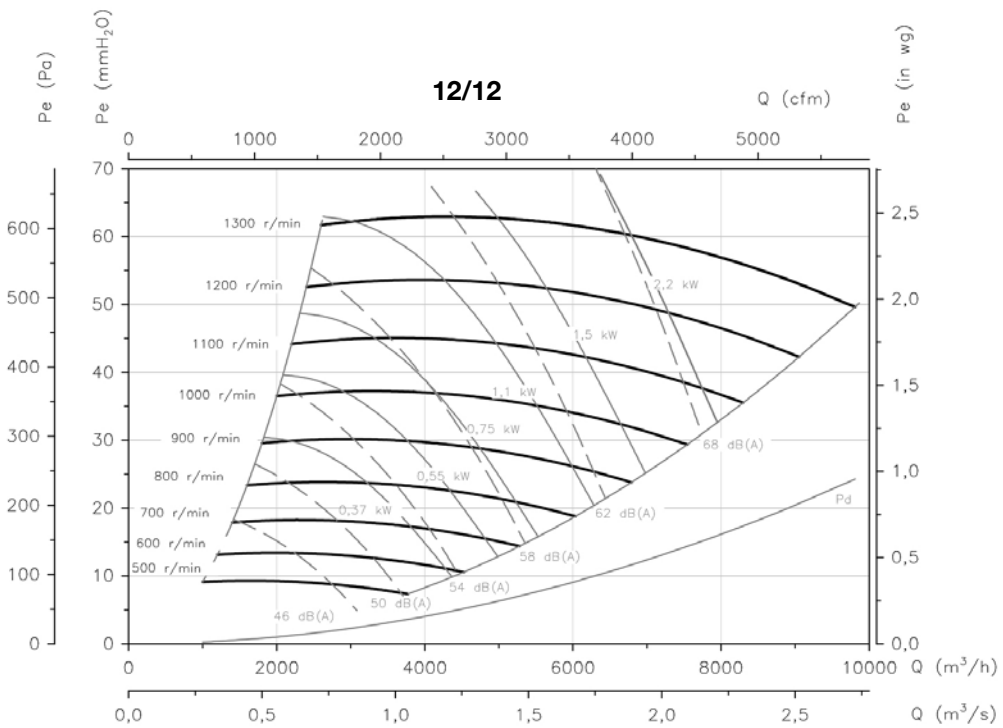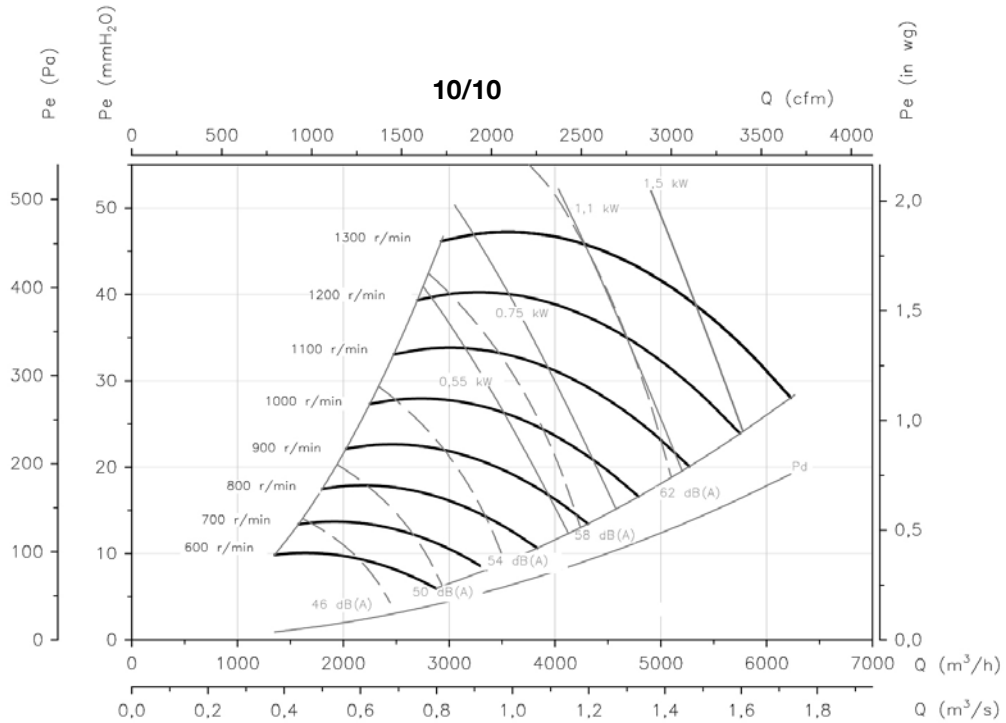

Characteristic curves

Q= Flow rate in m³/h, m³/s and cfm



Pe= Static pressure in mm H₂O, Pa and inwg

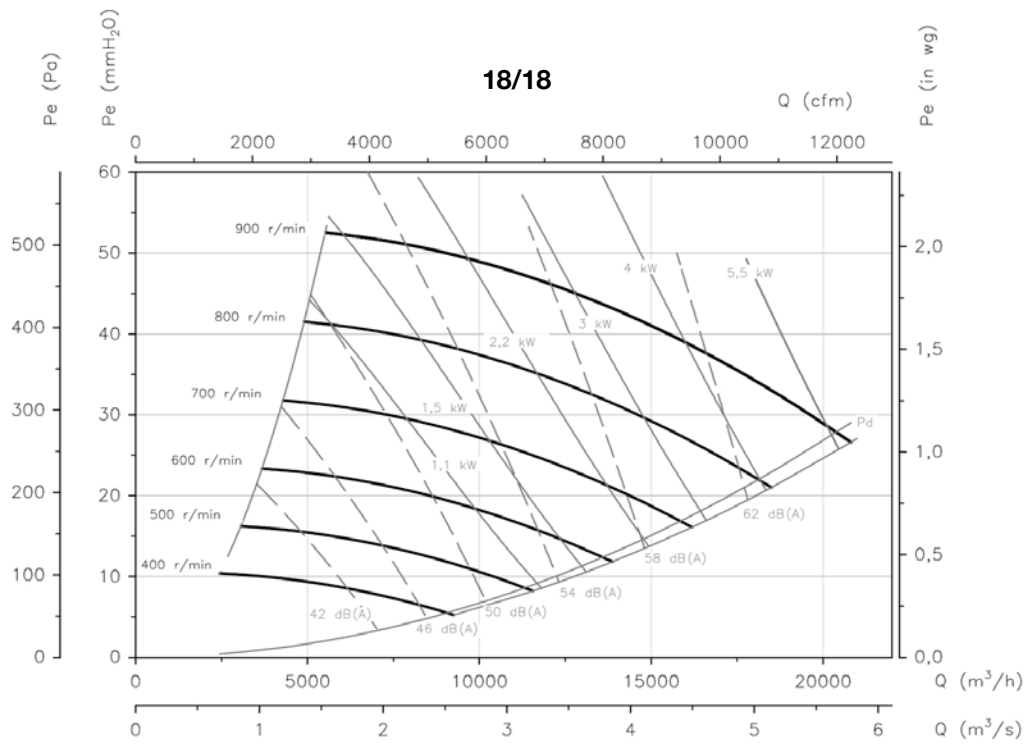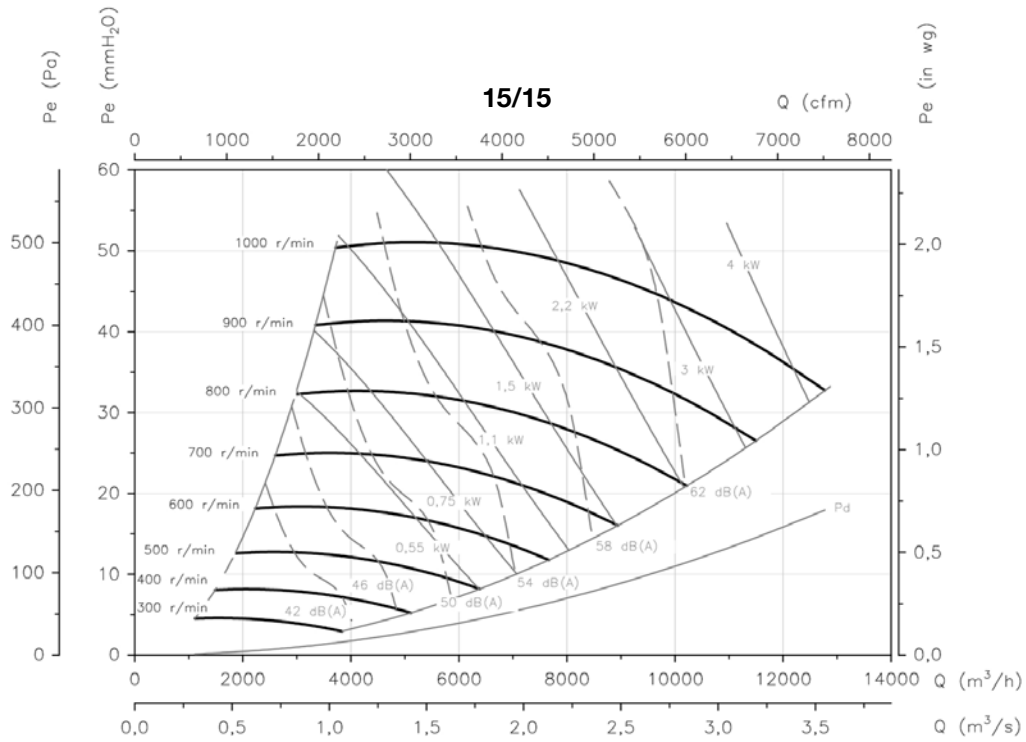

Characteristic curves

Q= Flow rate in m³/h, m³/s and cfm

Pe= Static pressure in mm H₂O, Pa and inwg

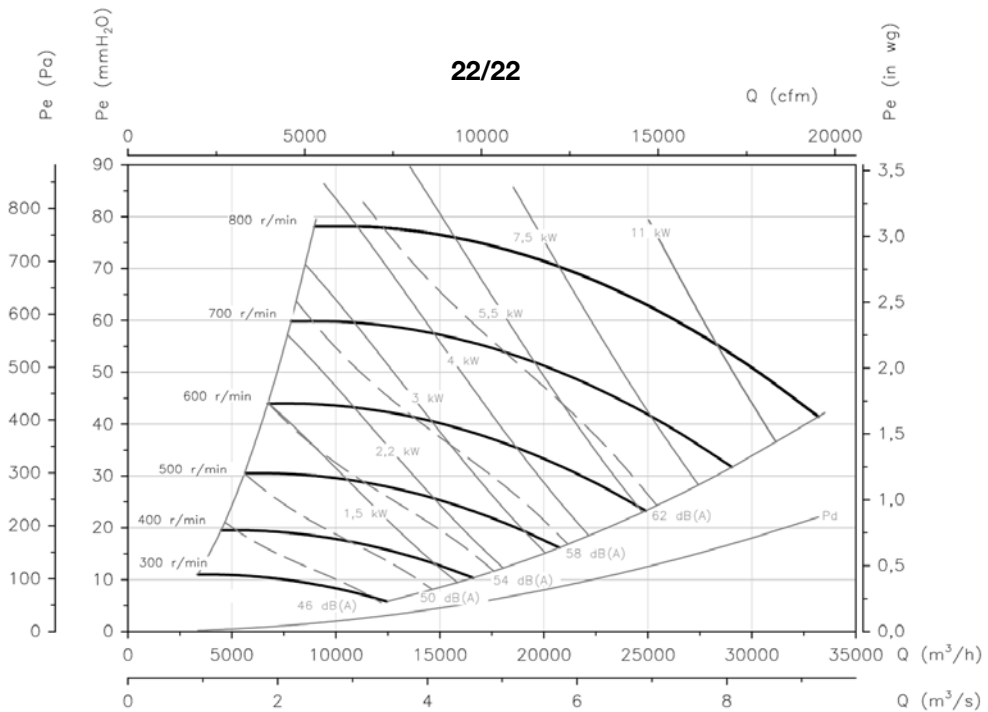
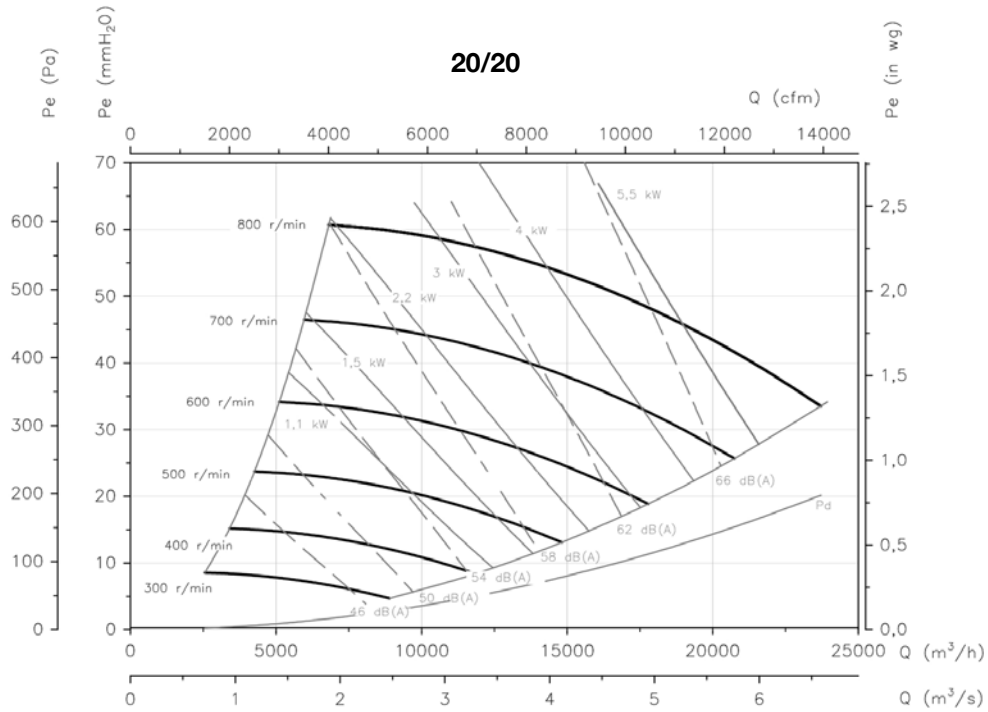


FILTRATION AND DISINFECTION UNITS

Characteristic curves

Q= Flow rate in m³/h, m³/s and cfm

Pe= Static pressure in mm H₂O, Pa and inwg

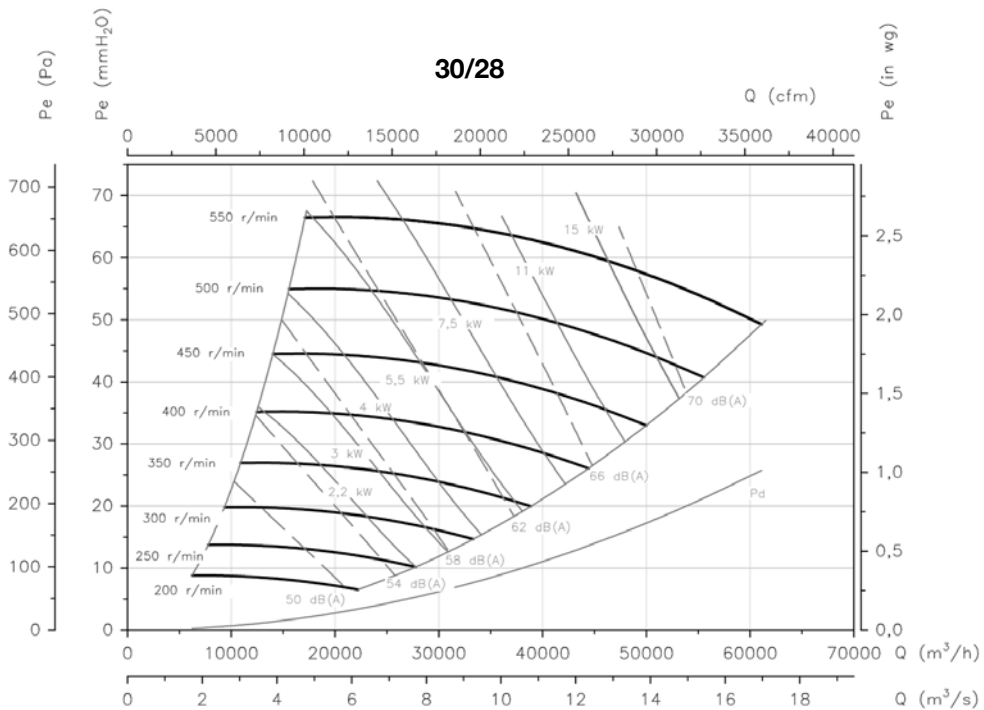
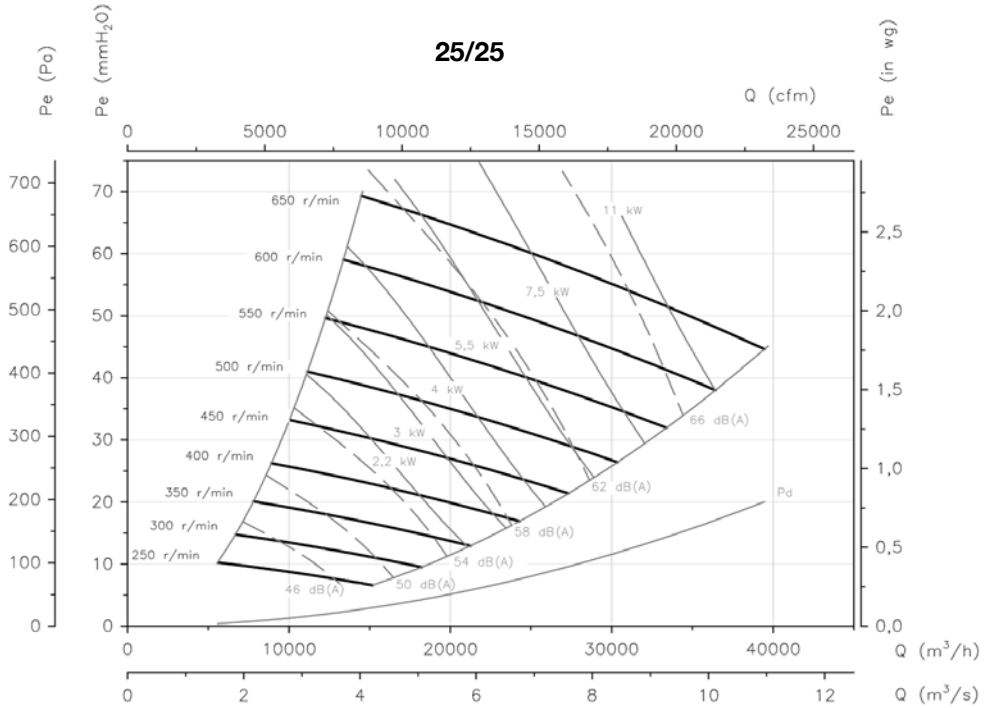


Characteristic curves

Q= Flow rate in m³/h, m³/s and cfm

Pe= Static pressure in mm H₂O, Pa and inwg

Load loss curves of units with filters

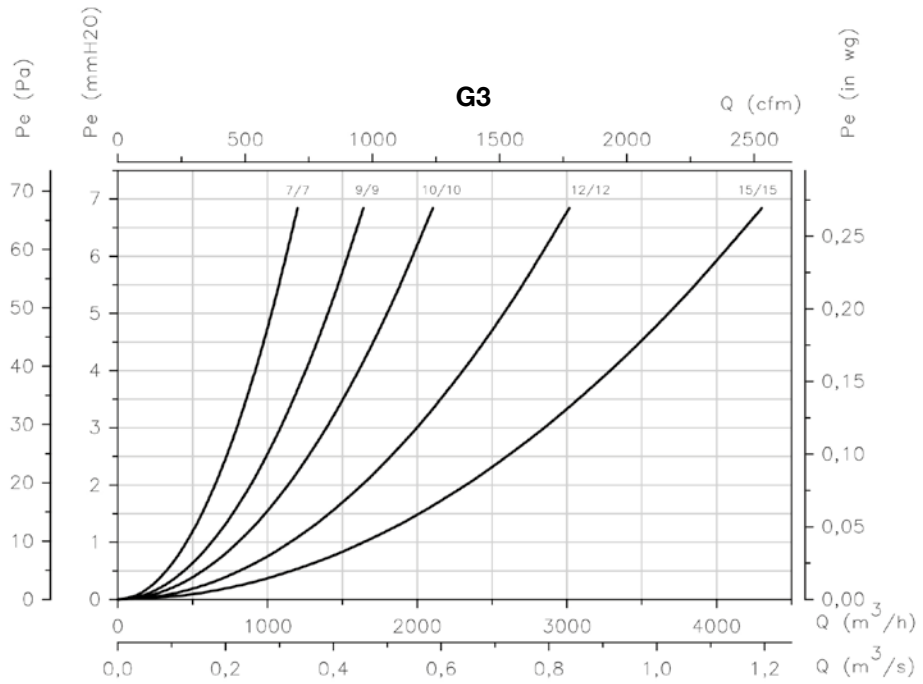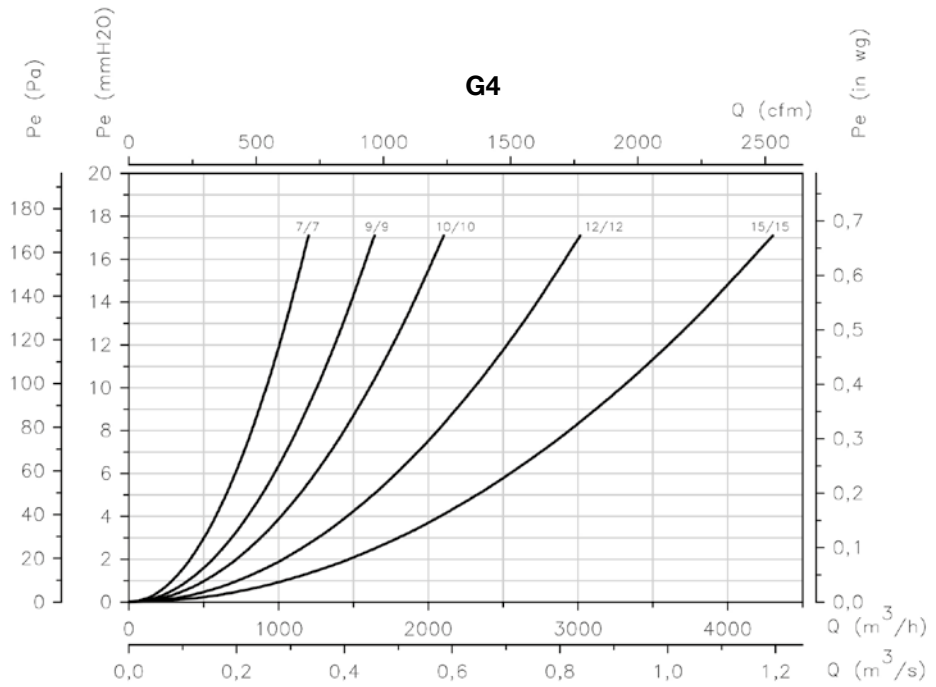



FILTRATION AND DISINFECTION UNITS

Characteristic curves

Q= Flow rate in m³/h, m³/s and cfm

Pe= Static pressure in mm H₂O, Pa and inwg

Load loss curves of units with filters

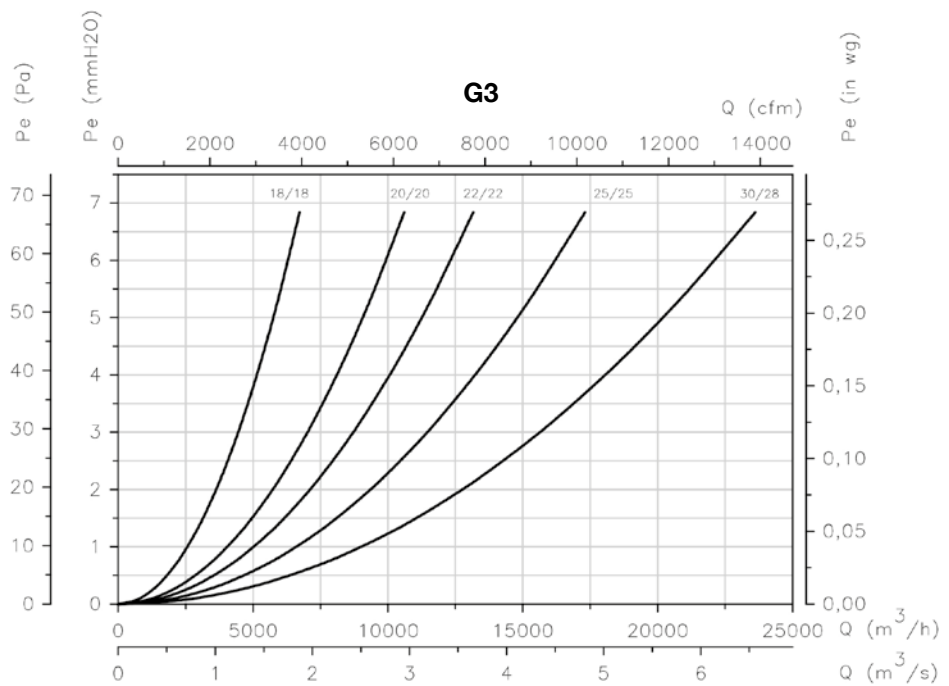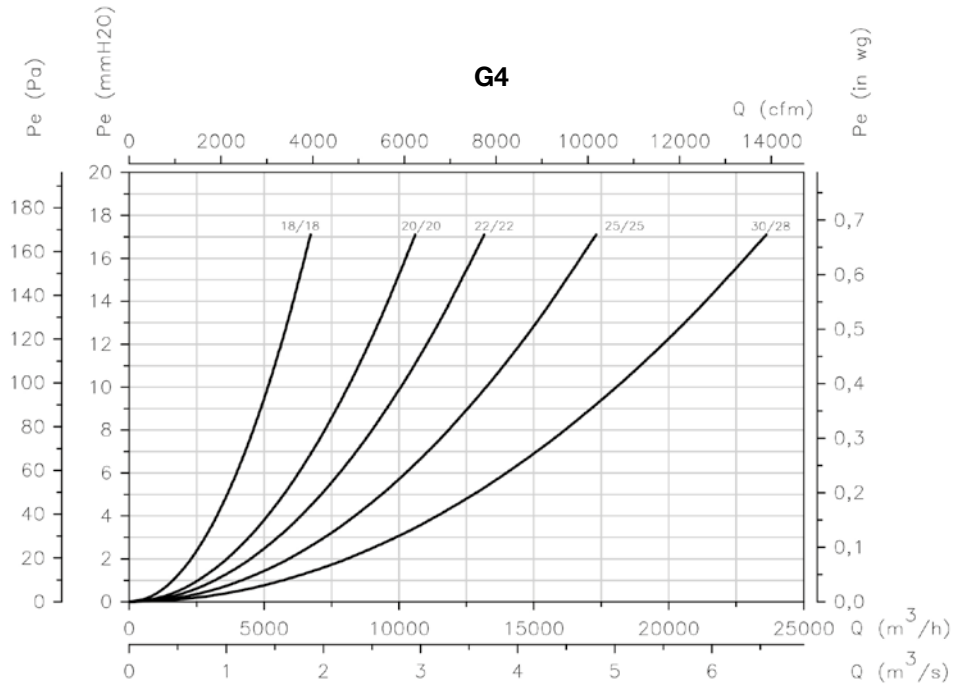

Accessories



INT



C2V



RM



VSD3/A-RFT
- VSD1/A-RFM



AET



TEJ



VIS



MF



MCA



MFE



MPCO